


## Hydraulic pivot Glass with stop 90°, F3

### Image:



### Dimensions:

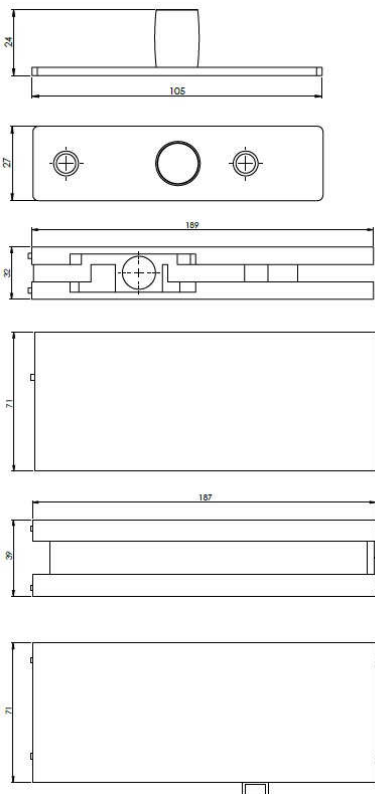

### Articlenumbers:

PSG-100

40-0200-003

### Mertech Taatsdeursystemen

Rijssen, Nederland

Telefoon +31 (0)85 9026 222

E-mail [info@mertech.nu](mailto:info@mertech.nu)

Website [www.mertech.nu](http://www.mertech.nu)

### Characteristics :

#### Suitable for type of doors:

Pivot doors single or double: Glass

#### Door thickness:

For 8 / 10- or 12-mm glass thickness

#### Invisible:

The top and bottom patch are visible

#### Suitable for ceiling height door panels:

Yes, up to 3 mm below the ceiling, this is even possible with room high doors.

#### Material:

Made of an aluminum housing

#### Rotation:

At the end of the door

#### Guarantee:

2 years

#### Adjustable:

Standard with adjustable closing speed, with a 0-point adjustment

#### Door weight:

Up to 100 kg per door leaf.

#### Door width:

Door width of up to 950 mm.

#### Certification:

DIN EN 1154, F3. Our systems are tested according to the European standard for hydraulic systems, 500.000 cycles guaranteed.

#### Firerating:

No

#### Floor heating friendly:

Yes, in combination with VP-20 or VP-30

#### Finish:

Standard stainless steel or black, other finishes on request

#### Accessoires:

VP-10 and top patch