


Hydraulic pivot Glass with stop 90°, F5

Image:



Dimensions:

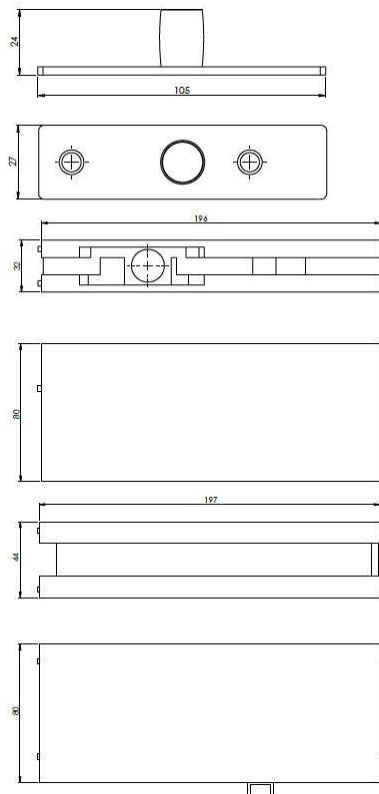

Articlenumbers:

PSG-150 40-0200-060

Mertech Taatsdeursystemen

Rijssen, Nederland

Telefoon +31 (0)85 9026 222

E-mail info@mertech.nu

Website www.mertech.nu

Characteristics :

Suitable for type of doors:

Pivot doors single or double: Glas

Door thickness:

For 8 / 10 or 12 mm glass thickness

Invisible:

The top and bottom patch are visible

Suitable for ceiling height door panels:

Yes, up to 3 mm below the ceiling, this is even possible with room high doors.

Material:

Made of an aluminum housing

Rotation:

At the end of the door

Guarantee:

2 years

Adjustable:

Standard with adjustable closing speed, with a 0-point adjustment

Door weight:

Up to 100 kg per door leaf.

Door width:

Door width of up to 1250 mm.

Certification:

DIN EN 1154, F5. Our systems are tested according to the European standard for hydraulic systems, 500.000 cycles guaranteed.

Firerating:

No

Floor heating friendly:

Yes, in combination with VP-20 or VP-30

Finish:

Standard stainless steel or black, other finishes on request

Accessoires:

VP-10 and top patch