


## Hydraulic build-in pivot with stop 90°, F3

### Image:



### Dimensions:

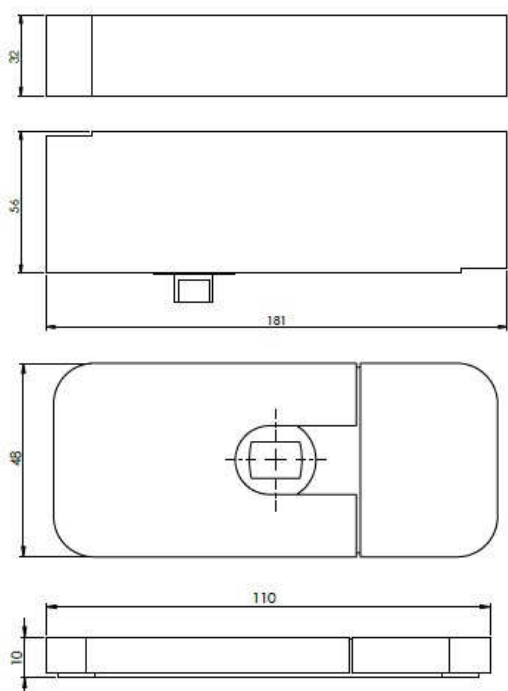

### Articlenumbers:

PSI-100                      40-0200-001

### Mertech Taatsdeursystemen

Rijssen, Nederland

Telefoon            +31 (0)85 9026 222

E-mail              info@mertech.nu

Website            www.mertech.nu

### Characteristics :

#### **Suitable for type of doors:**

Pivot doors single or double: Wood, Steel and Aluminium.

#### **Door thickness:**

from 40 mm

#### **Invisible:**

The pivot is incorporated into the door. A floorplate is visible only.

#### **Suitable for ceiling height door panels:**

With our unique top pivot it is possible to mount up to 3 mm below the ceiling, this is even possible with room high doors.

#### **Material:**

Made of an aluminum housing

#### **Rotation:**

At the end or the middle of the door

#### **Guarantee:**

2 years

#### **Adjustable:**

Standard with adjustable closing speed, with a 0-point adjustment

#### **Door weight:**

Up to 100 kg per door leaf.

#### **Door width:**

Door width of up to 950 mm.

#### **Certification:**

DIN EN 1154,F3. Our systems are tested according to the European standard for hydraulic systems, 500.000 cycles guaranteed.

#### **Firerating:**

No

#### **Floor heating friendly:**

Yes, in combination with VP-20 or VP-30

#### **Finish:**

Standard stainless steel or black, other finishes on request

#### **Accessoires:**

VP-10 and Z-profiel